



INFINITY **FLOORING**

*The Ultimate in
Weight Room Flooring*


INFINITY FLOORING

Over the past 20 years only one flooring product has consistently proven its ability, not only to survive the rigors of the most advanced weight training facilities in the country, but to deliver the ultimate in shock and noise reduction, ease of maintenance and world class good looks year in and year out. That product is **INFINITY FLOORING**.




Purdue University - Colby Fitness Center





INFINITY FLOORING was designed to take the abuse of various demanding fitness applications such as weight rooms, cardiovascular areas and aerobic facilities as well as weather the extreme conditions of Professional and Collegiate Athletic Weight Rooms, Student Recreation Centers, Performance Training Facilities, Military Training Facilities, High Schools and Fitness Centers.



INFINITY FLOORING is one of the few products available that can stand up to constant abuse of heavy weights being dropped directly on the floor without denting, tearing or splitting. In the most demanding applications, where other flooring products have failed, **INFINITY FLOORING** has performed year after year.



University of Houston




Exclusive Design

Features

- Tough, patented polymeric EPDM surface is durable and long lasting
- **Industry Leading One inch thick** rubber floor tiles provide resiliency and comfort
- 24" x 24" tiles feature high traction, Non-Slip Surfaces, Wet or Dry
- **INFINITY FLOORING** contains a unique built-in fungicide to prevent bacterial growth
- Superior sound absorption properties
- Installed indoors or outdoors
- Odorless


Geometric raised bottom layer allows air flow within the flooring system and also provides a resilient, yet comfortable surface

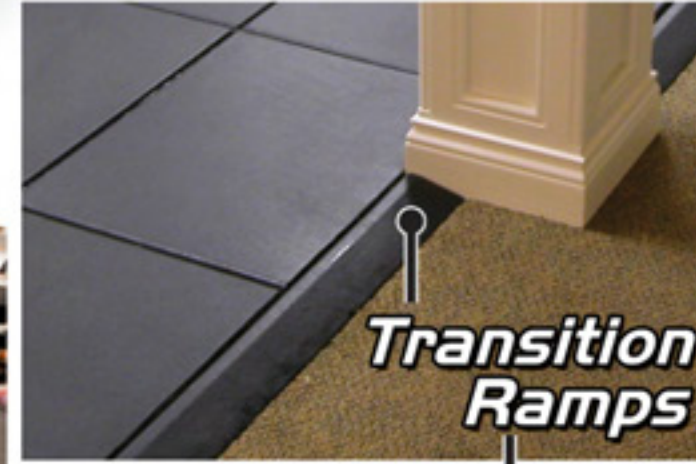

Transition Ramps



Non-Slip Wet or Dry

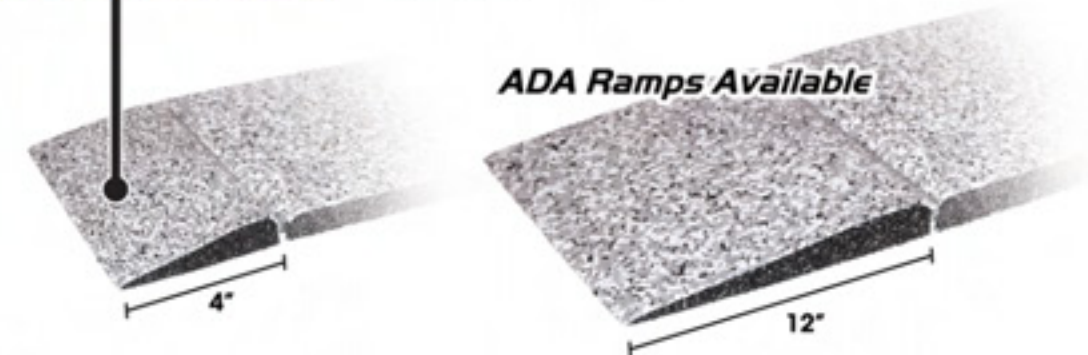


ADA Ramps Available

Standard Color Options

INFINITY FLOORING offers over 10 standard color combinations. For assistance with choosing the right color for your venue contact us at 1-888-479-1017 or visit us online at www.InfinityFlooring.com. Looking for more choices? Be sure and see our Custom Color Options in this brochure and online.




Black

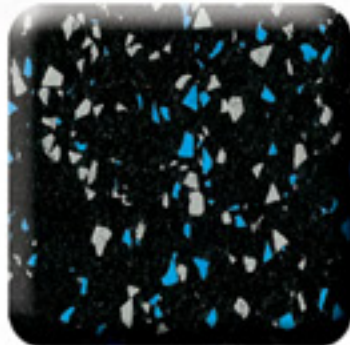


Blue/Grey (20%)




Java (20%)

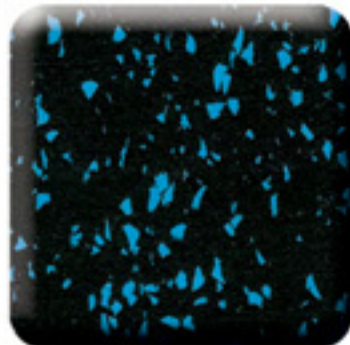


Blue (20%)

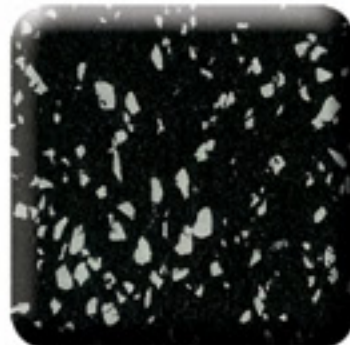


Galaxy (20%)

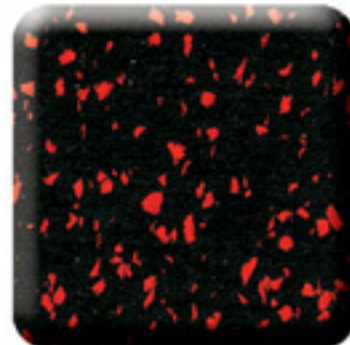

Red (20%)

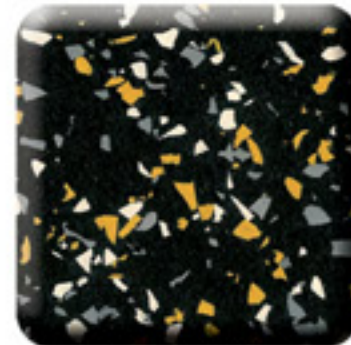

Gold/Grey (30%)

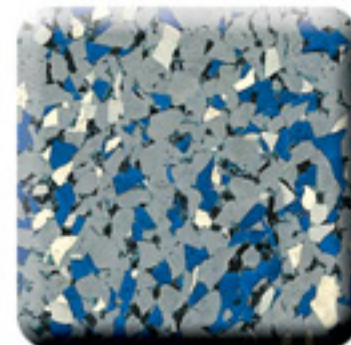


Blue Steel (95%)



Granite (95%)



SandStone (95%)

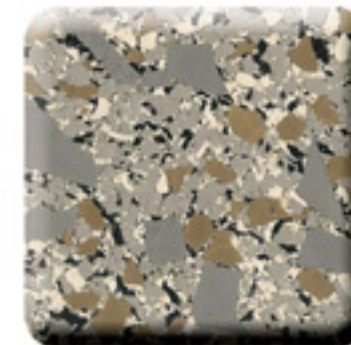

EarthStone (95%)



Installation

The INFINITY FLOORING system is installed using a unique mechanical fastening system. Tough nylon dowel pins lock the tiles together, but can be easily removed if the tile needs to be replaced. Ramps are available to allow for a gradual transition from one inch (1") tile to the surrounding surface.

INFINITY FLOORING may be installed directly over newly cured concrete just as soon as it can be walked on, regardless of the moisture content. This allows your facility to open on schedule without delays while waiting for the concrete moisture content to fall to a specified level.


INFINITY FLOORING is installed by Infinity Performance's own expert installers which are the best in the industry. They travel throughout the United States providing our clients with professional installations that enhance the quality and character of every weight room.



Custom Logos & Tiles



Our custom logos are made from different colored 1/8" thick durable EPDM rubber and molded into the surface as an integral part of the flooring tiles. The logos are every bit as durable as the flooring tile itself. All logos are warranted for 5 years!

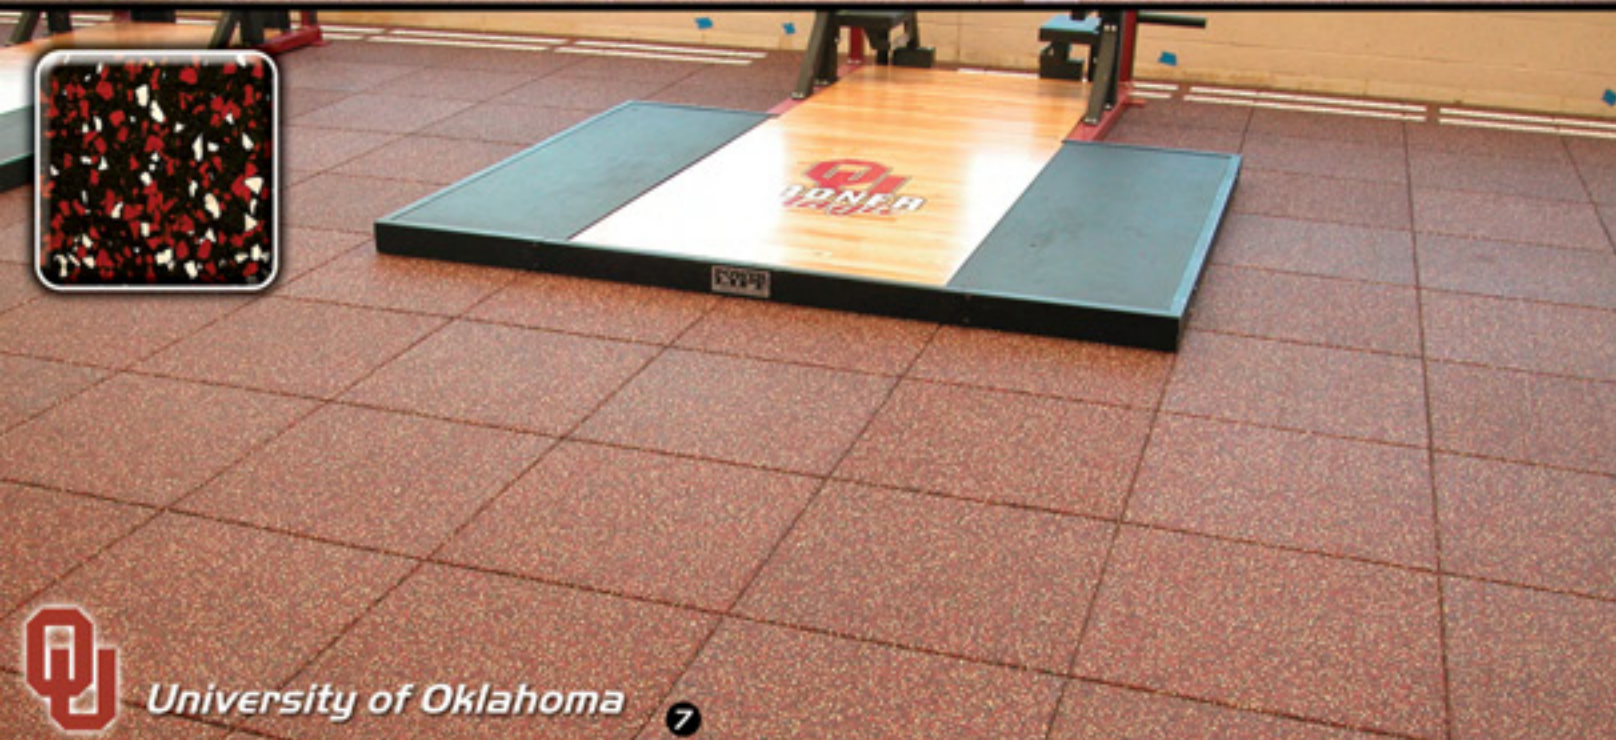

Custom Color Options


Our Clients

EPDM Custom Color Palette



Thanks to our amazing array of colors, you can create your very own custom color Infinity Flooring tile. Our custom color capability allows us to create colors that are unique to your facility. Please contact us for assistance in creating your very own custom color (888-479-1017), or you may simply choose 2 or 3 different colors from the palette above and specify the percentage of each color in 5% increments. The dominant color should not be greater than 80% and you must allow a minimum of 5% black for production purposes. Once your custom color is mixed, we can provide a laser printed color proof for your review. Please visit www.InfinityFlooring.com for our most current color chart information.

Custom Color Equation

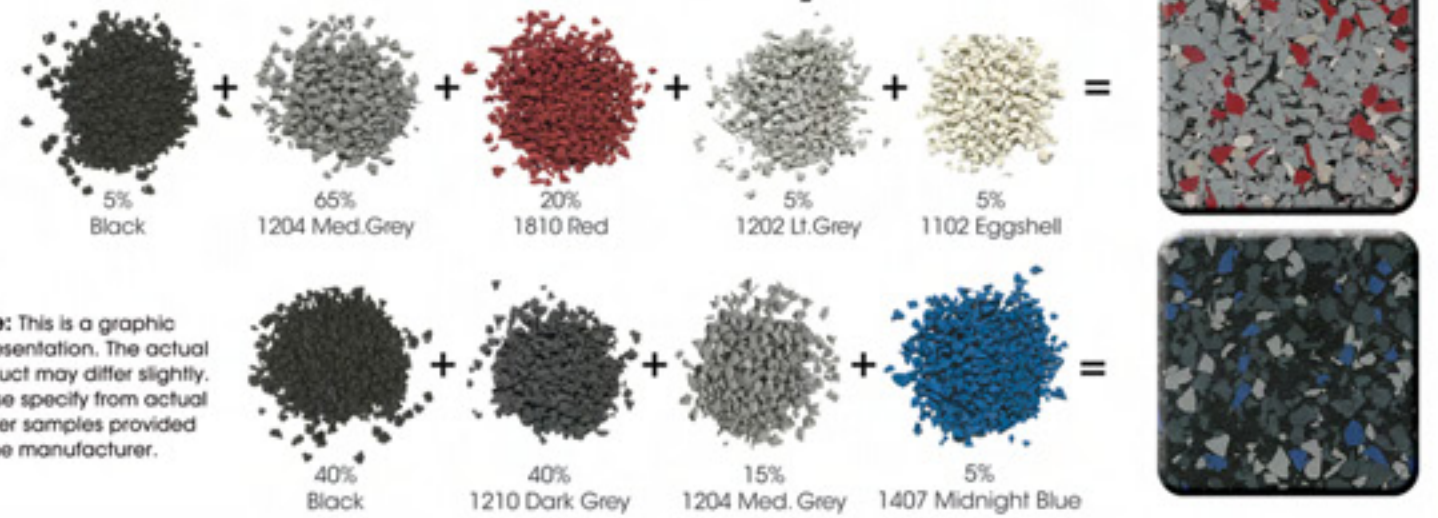

Note: This is a graphic representation. The actual product may differ slightly. Please specify from actual rubber samples provided by the manufacturer.

Collegiate

- University Of Kansas
- University Of Michigan
- University Of Southern Cal.
- University Of Notre Dame
- University Of North Carolina
- University Of Connecticut
- University Of Kentucky
- University Of Florida
- University Of Oklahoma
- University Of Arkansas
- University Of Nebraska
- University Of Houston
- University Of Alabama-UAB

- University Of Virginia
- University Of LaVerne
- University Of Richmond
- University Of Maine
- University Of Missouri
- Florida State University
- Duke University
- The Ohio State University
- Miami University-Oxford
- Stanford University
- Purdue University
- Syracuse University
- Xavier University

- Rutgers State University
- Georgetown College
- Texas Christian University
- Kansas State University
- Western Kentucky University
- Olivet Nazarene University
- Michigan Tech University
- Bowling Green State University
- Wittenberg University
- Baylor University
- Siena Heights University
- Butler County Comm. College
- Ball State University

- Providence College
- Slippery Rock University
- Guilford College
- Emory University
- Valdosta State University
- Tulane University
- Iona College
- Wilkes University

Please visit www.InfinityFlooring.com for our most current client list.

Training Facilities

- San Diego Chargers
- Boston Celtics
- Pittsburg Steelers
- United States Tennis Association
- International Performance Institute
- Richard Childress Racing
- 5 Off 5 On - Pit Instruction Training
- Premier Courts
-
- YMCA
- Moore Rehabilitation Center
- Spartanburg Regional Health Care
- Surfside Wellness Center
- Elmwood Fitness Center
- Mid Valley Athletic Club
- Hoffacker Health & Fitness
- PT & Fitness Plus, Inc.
- Deveau's Gymnastics
-
- U.S. Armed Forces
- United States Army
- United States Navy
- United States Marines
- Homeland Security
- Federal Bureau of Investigation
- Naval Academy Prep School

High Schools

- Aloha High School
- Archbishop Moeller High School
- Bergen Catholic High School
- Bishop Chatard High School
- Bishop Verot High School
- Father Judge High School
- Lubbock Monterey High School
- St. Xavier High School
- Union High School



MARINES
THE FEW. THE PROUD.



Specifications

Physical Specification: INFINITY FLOORING configurations consist of a high density unitary prefabricated polymeric wear surface permanently molded to an underlayment incorporating tapered support legs to maximize shock absorbency and traction underfoot in wet and dry conditions as well as twelve molded perimeter dowel holes that accept specially designed barbed dowel pins to promote ease of installation.

Component Specification: INFINITY FLOORING is a factory molded modular surfacing system composed of high quality rubber granules bound in both underlayment and wear surface with a wear and weather resistant polyurethane. The polyurethane binder is composed of MDI (diphenylmethanediisocyanate) isocyanate and polyether (polypropylene glycol) polyols. TDI (toluene diisocyanate) isocyanate or catalysts based on lead or mercury are not utilized. Rubber granules in both wear surface and underlayment are specially blended to enhance tile strength, durability and energy absorption characteristics.


		1" Thickness	
Product Data		20% EPDM Topped	95% EPDM Topped
Dimensions (78° F):		1" x 24" x 24" ± 1/8"	1" x 24" x 24" ± 1/8"
Wear Surface Density		60 lb./ft ³ min.	75 lb./ft ³ min.
Coefficient of Thermal Expansion		1.1 x 10 ⁻³ in./ft/°F	1.1 x 10 ⁻³ in./ft/°F
Thermal Conductivity		0.400 Btu-in./hr-ft ² - °F	0.400 Btu-in./hr-ft ² - °F
Void Volume		13% minimum	13% minimum
Weight		16 lbs./tile 4 lb./ft ²	16 lbs./tile 4 lb./ft ²
Physical Data Test		ASTM	
Tensile Strength	D412	200 lb./in ² min	150 lb./in ² min
Elongation of Break	D412	80% minimum	75% minimum
Impact Insulation Class	E49	> 50	> 50
Tear Resistance	D624	75 lb./in min.	60 lb./in min.
Coefficient of Friction	D2047	>0.99	>0.99
Noise Reduction Coefficient	C423	0.10 sabine/ft ²	0.10 sabine/ft ²
Flammability (Burning Pill Test)	D2859	8 of 8 samples passed	8 of 8 samples passed
Abrasion Testing 2000 cycles, H22 wheels	D3389	0.1 maximum mg loss per cycle	0.6 maximum mg loss per cycle

Installation: INFINITY FLOORING may be installed indoors over most concrete, wood, or tile floors. The floor over which INFINITY FLOORING is installed must be level, in good condition, and clear of dirt and loose debris. Cracks greater than 1/8" should be filled.

Installation must be performed by the manufacturer's own installation crew. For complete design and installation information, please contact Infinity Performance, Inc. at 888-479-1017

Maintenance: Taski floor care and maintenance products, available nationally, offer simple and reliable protection and performance. For more detailed information, please refer to the INFINITY FLOORING Maintenance Instructions.

Warranty: INFINITY FLOORING is warranted for a period of 5 years against premature deterioration, manufacturer's defects as well as splitting or tearing due to damage from free weights. A 5-year installation warranty is issued when the floor is installed by Infinity Performance's own installation crew.

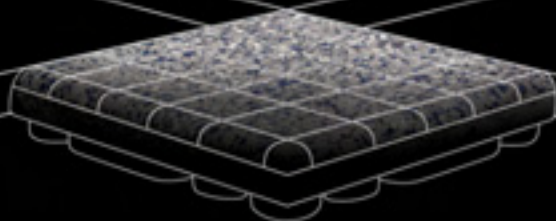

Manufactured By:
INFINITY
PERFORMANCE
above and beyond

Phone: 317.479.1017
 Toll Free: 888.479.1017
 Fax: 317.479.1018

www.InfinityFlooring.com